

Suitable for Transferring Kerosene & Diesel

- 10 minutes to empty 200 L drum.
- Easy to use gun nozzle.
- Suction pipe with mesh strainer.

Applications

- Kerosene
- Diesel



Specifications

Model	FP-25
Connection Dia	25 mm (1")
Total Head	3.5 m (11 ft)
Delivery Volume	20 L/min (5 USG/min)
Voltage	AC 100 V AC 220 V
Frequency	50 Hz / 60 Hz
Power Code	4 m (13 ft)
Delivery Hose	1.5 m (4.9 ft)
Gross Weight	6 kg
Dimensions LxWxH (mm)	290 x 280 x 615
Packing Unit	1



FP-25

"HAND ROTARY PUMP" Compact in Design & Light Weight

- Applicable for oil from high to low viscosity.

Applications


- Machine oil
- Heavy fuel oil A
- Kerosene
- Diesel



*Oil temperature is over 10°C

Specifications

Model	SB-20	SB-25
Delivery Volume	20 L (5 USG/min) / 105 Rotations	20 L (5 USG/min) / 72 Rotations
Impeller Material	PPS	
Delivery Hose (mm)	20 x 1100 (¾" x 43")	25 x 1280 (1" x 50")
Gross Weight	24 kg	25 kg
Dimensions LxWxH (mm)	1065 x 245 x 145	1085 x 202 x 225
Packing Unit	6	4

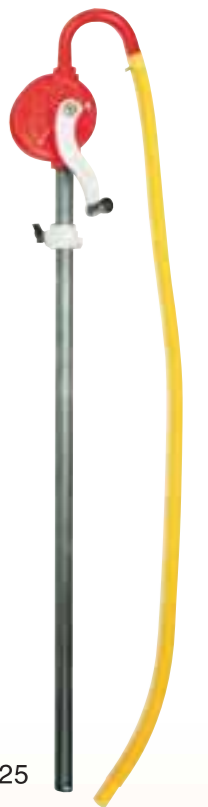

SB-25

For High Viscosity Oil (Up to 2000 cst)

- Specially designed for dispensing oil at service stations.

Applications

- High viscosity oil



SO-25

"HIGH LITER PUMP" High Volume

- Delivers 1 L per rotation.
- Mesh strainer can filter fine dust.
- Applicable for low viscosity oil.

Applications

- Diesel
 - Kerosene,
 - Spindle oil
 - Heavy fuel oil A
- *Oil temperature is over 10°C



LP-32

Specifications

Model	SO-25
Delivery Volume	0.5 L/Stroke (0.1 USG/min)
Pump Length	1380 mm (54")
Suction Pipe Dia	32 x 1038 (1¼" x 40")
Gross Weight	55 kg
Dimensions LxWxH (mm)	1080 x 398 x 220
Packing Unit	5

Specifications

Model	LP-32
Delivery Volume	1 L / 1 Rotation, (Normal Use) 100 L/min (26 USG/min)
Suction Pipe	32 x 956 (1¼" x 37")
Delivery Hose (mm)	32 x 1280 (1¼" x 50")
Strainer	#60 with Mesh, Polyethylene
Gross Weight	38 kg
Dimensions LxWxH (mm)	1137 x 252 x 295
Packing Unit	5

"BIG AUTO PUMP" Light weight & Economical to Use

- Made from strong plastics.

Applications (PP-25)

- Dispensing small volumes of liquid
- Heavy fuel oil B
- Kerosene
- Diesel
- Water
- Wine



(PP-25C)

- Solvent



PP-25

PP-25C

Specifications

Model	PP-25	PP-25C
Delivery Volume	20 L/min (5 USG/min)	
Material	Polyethylene	
Pump Length	1190 mm (47")	
Suction Pipe (mm)	(Inside Dia) 22 x 875 (0.86" x 34")	
Delivery Hose (mm)	(Inside Dia) 20 x 1180 (¾" x 46")	
Gross Weight	11 kg	
Dimensions LxWxH (mm)	1237 x 435 x 257	
Packing Unit	20	

PP-25C Chemical Compatibility Rating Information

Rating Scale		
○	No Effect	
△	Moderate Effect	
×	Not Recommended	
N	Information Not Available	
Chemical (100% concentration unless noted)	Rating	
A Acetone	×	
Ammonium Hydroxide	N	
C Chlorine	○	
D Deionized Water	△	
Diesel Fuel	○	
E Ethanol	○	
G Gasoline	△	
Glycol	N	
H Hydrochloric Acid (20%)	○	
Hydrochloric Acid (37%)	○	
Hydrochloric Acid (100%)	○	
I Isopropyl Alcohol	N	
K Kerosene	○	
L Lacquer Thinner	×	
M Methanol	○	
Methyl Chloride	×	
Methyl Ethyl Ketone	×	
Mineral Spirits	N	
Motor Oil	○	
N Nitric Acid (20%)	△	
Nitric Acid (50%)	△	
Nitric Acid (Concentrated)	△	
O Oil, Hydraulic	○	
P Paint	×	
Phosphoric Acid (< 40%)	○	
Phosphoric Acid (≥ 40%)	○	
S Salt Water	○	
Seawater	○	
Sodium Hypochlorite	N	
Sodium Hydroxide (20%)	N	
Sodium Hydroxide (50%)	N	
Sodium Hydroxide (80%)	N	
Sulfuric Acid (<10%)	○	
Sulfuric Acid (10-75%)	○	
Sulfuric Acid (75-100%)	○	
W Water	○	
X Xylene	△	