



GENERATORS

KOSHIN Generators Fitted with AVR Featuring High Durability YAMAHA Engine

- **AVR (Automatic Voltage Regulator)**
KOSHIN's AVR regulates power output fluctuations to enable operation of sensitive electronic equipment.
- **Oil Warning System**
The system automatically stops the engine when the oil drops below a predetermined level.
- **Large Fuel Tank**
Large capacity fuel tank with oil fuel meter.
- **DC Output Capability**
Direct current output capability permits recharging of batteries.
- **Rugged Full-Frame**
Protects the generator from rough handling and damage.




GE-3000X



GE-7200XS

Examples of Application

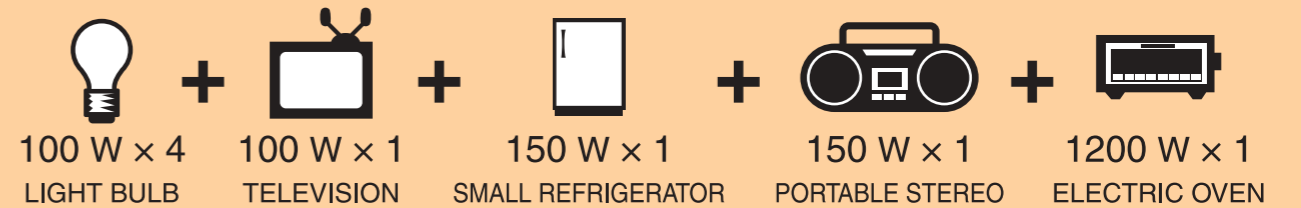


GE-3000X

2000 w



GE-7200XS

5000 w

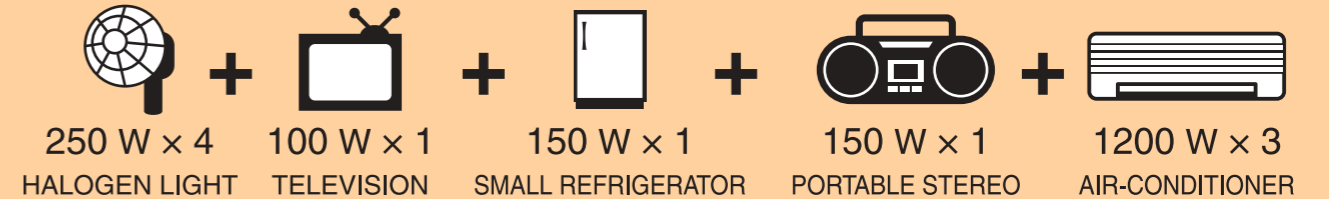

Specifications

Model		GE-3000X	GE-7200XS
Model		YAMAHA MZ175	YAMAHA MZ360
Type		Single Cylinder, Forced Air Cooling 4 Stroke Gasoline Engine	
Displacement		171 cc	357 cc
Rated Output		3.3 kW (4.5 PS) / 3600 rpm	7.1 kW (9.7 PS) / 3600 rpm
Max. Output		4.0 kW (5.5 PS) / 4000 rpm	8.8 kW (12.0 PS) / 4000 rpm
Ignition System		T.C.I. (Transistor Controlled Ignition)	
Fuel Tank Capacity		18 L	25 L
Operating Hours		16 hrs	9 hrs
Oil Capacity		600 cc	1100 cc
Sound Level		65 db(A) / 7 m	72 db(A) / 7 m
Starting Method		Recoil	Electric Start and Recoil
GENERATOR	AC Output	Rated (50 Hz) 2.0 KVA Max. (50 Hz) 2.4 KVA	5.0 KVA 6.1 KVA
	Rated Voltage	AC 220 V	
DC Output		12 V / 8.3 A	
Rated Power Factor (Cos φ)		1	
Features		AVR, Oil Warning System, Non-fuse Breaker	
Gross Weight		48 kg	93 kg
Dimensions LxWxH (mm)		605 x 450 x 495	705 x 555 x 570
Packing Unit		1	