

Fine Mist Sprayer with Tank

• Convenient hose reel attached.



φ5×100m Hose



5 Level Spraying Pressure

φ5×50m Hose

50L Tank



φ8.5×20m Hose
25L Tank



Convenient Caster for Mobility



Easy & Tidy Hose Coiling



Specifications

Model (Hose Dia)	MS-E2R25TH85 (φ8.5 mm)	KV-ER50 (φ5 mm)	KV-ER100 (φ5 mm)	TK-50N
Type	Double Piston Pump			
Max. Suction Head	8.6 L/min (2 USG/min)			
Delivery Volume	1.5 - 4.3 L/min	1.0 - 2.9 L/min	1.0 - 2.4 L/min	Length: 900 mm (40") Width: 575 mm (22") Height: 843 mm (34") Tank: 50 L (13 USG)
Max. Pressure	3.0 MPa (30 kgf/cm ²)			
Nozzle Head	Granular Type 2-Head Nozzle, Bubble Type 2-Head Nozzle Vertical			
Delivery Hose	φ8.5 × 20 m (66 ft)	φ5 × 50 m (164 ft) (With Reel)	φ5 × 100 m (328 ft) (With Reel)	
Type	Forced Air Cooling 2 Stroke Gasoline Engine	Forced Air Cooling 4 Stroke Gasoline Engine		
Model	Robin EC025	Robin EH025		
Exhaust Volume	24.5 cc			
Rated Output	0.55 kW (0.7 PS) / 6000 rpm	0.55 kW (0.7 PS) / 7000 rpm		
Max. Output	0.88 kW (1.1 PS) / 7000 rpm	0.81 kW (1.1 PS) / 7000 rpm		
Fuel	2 Stroke Mixed Gas and Oil	Automotive Unleaded Gasoline		
Fuel Tank Capacity	0.6 L	0.5 L		
Continuous Operating Time	Approx. 40 min			
Starting Method	Recoil Starter			
Gross Weight	25.5 kg	29.5 kg	29.5 kg	24 kg
Dimensions LxWxH (mm)	705 × 490 × 635	710 × 470 × 450		875 × 590 × 595
Packing Unit	1			


"GROUND MASTER" Backpack Manual Sprayer

Specifications

Model	RM-10	RM-15	RM-18
Tank Capacity	10 L	15 L	18 L
Pump	Piston Pump		
Max. Pressure	0.5 MPa (5 kgf/cm ²)		
Nozzle Length	46 cm	62 - 109 cm	
Spray Volume [Common Pressure] [0.3 MPa (3 kgf/cm ²)]	Bubble Type Herbicide Nozzle : 600 mL/min Granular Type Herbicide Nozzle : 700 mL/min 2-Head Nozzle (Shower Spray) : 670 mL/min (Sharp Spray) : 1260 mL/min		
Spray Pressure	0.3 MPa (3 kgf/cm ²)		
Connection	G ¹ / ₄ (PF ¹ / ₄)		
Standard Accessories	1 Bubble Type Herbicide Nozzle with Cover, 1 Granular Type Herbicide Nozzle, 1 2-Head Nozzle, 1 Measuring Cup, 1 Nozzle Grip, 1 Nozzle Pipe		
Net Weight	4.7 kg	5.1 kg	5.4 kg
Dimensions LxWxH (mm)	435 × 465 × 660	435 × 565 × 679	405 × 265 × 735
Packing Unit	2		



Standard Accessories

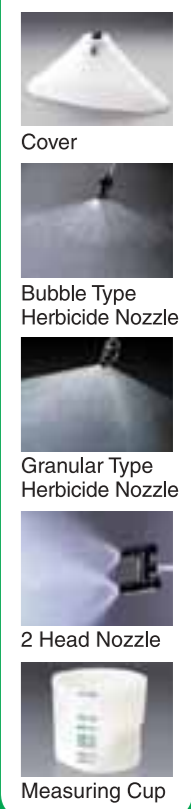

Easy to Change & Durable Battery

- Battery power indicator included.
- Buzzer will sound when recharging is required.



Specifications

Model	KK-10V	KK-10VL	KK-15V
Tank Capacity	10 L		
Pump	Ceramic Gear Pump		
Motor	DC 12 V		
Max. Pressure	0.3 MPa (3 kgf/cm ²)		
Spray Volume	2-Head Nozzle : 0.7 L/min [Spray Pressure: 0.27 MPa (2.7 kgf/cm ²)] Bubble Type Herbicides Nozzle : 0.5 L/min [Spray Pressure: 0.28 MPa (2.8 kgf/cm ²)] Granular Type Herbicides Nozzle : 0.8 L/min [Spray Pressure: 0.27 MPa (2.7 kgf/cm ²)]		
Operating Time	1 hr 20 min		2 hrs 30 min
Current	Approx. 1.8 A		
Battery	Ni-Cad Battery, 2500 mAh	Ni-Cad Battery, 5000 mAh	
Battery Charger	Hi-Charging AC 100 V, 50 / 60 Hz		
Standard Rechargeable Hours	1 hr 20 min	2 hrs 30 min	
Connection	G ¹ / ₄ (PF ¹ / ₄)		
Fuse	5 A		
Standard Accessories	1 Battery Charger, 1 Bubble Type Herbicide Nozzle with Cover, 1 Granular Type Herbicide Nozzle, 1 2-Head Nozzle, 1 Measuring Cup, 1 Syringe, 1 Nozzle Grip, 1 Nozzle Pipe		
Gross Weight	4.7 kg	5.5 kg	5.8 kg
Packing Unit	1		