




Durable and High Performance Generator

- High Fuel Efficiency
- Ultimate Durability
 - 100% Copper Wire for Alternator
 - Anti-Rusty fuel tank
 - Full roll cage for ultimate protection
- Less Vibration & Quiet Operation

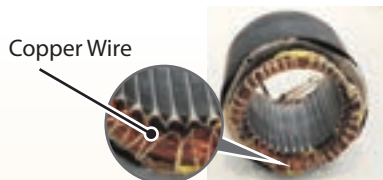

KOSHIN
Engine




GV-3000

New

**HONDA
Engine**





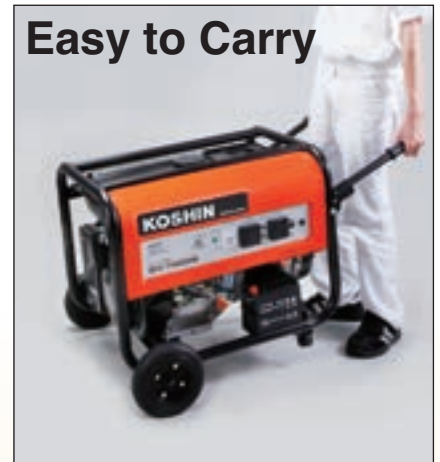









GVH-3000



GV-7600S

Specifications

Model		GV-3000	GVH-3000	GV-7000S	GVH-7000S	GV-3200	GVH-3200	GV-7600S	GVH-7600S	
GENERATOR	Phase	Single								
	Voltage Regulation	AVR								
	AC	Rated Output	2kVA		5kVA		2.3kVA		5.5kVA	
		Maximum Output	2.2kVA		5.5kVA		2.5kVA		6kVA	
	Rated Frequency	50 Hz				60 Hz				
	Rated Voltage	220V								
	Rated Ampere	9.1A		22.7A		10.5A		25A		
	DC Output	12V/8.3A								
	Continuous Running Time rated load	9.5h	9.3h	7.5h	7.8h	6.3h	7.4h (Estimate)	5h	6.3h (Estimate)	
	Tank Capacity	12.6L		22.6L		12.6L		22.6L		
Receptacle	  European socket, CEE 7/4, 2pcs		  European socket, CEE 7/4, 1pc NEMA L6-30 Socket, 1pc		  BS1363, 2pcs OR   CEE 7/4, 2pcs		  BS1363, 2pcs OR   CEE 7/4 NEMA L6-30			
ENGINE	Model	Koshin K210	HONDA GX160	Koshin K420	HONDA GX390	Koshin K210	HONDA GX160	Koshin K420	HONDA GX390	
	Type	Air-cooled, 4-stroke, OHV, single cylinder								
	Exhaust Volume	212cc	163cc	420cc	389cc	212cc	163cc	420cc	389cc	
	Oil Alert System	Standard								
	Starting system	Recoil		Recoil/Electric starter		Recoil		Recoil/Electric starter		
	Battery	-		Maintenance-free type		-		Maintenance-free type		
Wheel Kit	-		Standard		-		Standard			
Package Size (WxDxH)	635x460x475(mm)		700x550x560(mm)		635x460x475(mm)		700x550x560(mm)			
Gross Weigh	44 kg (97 lbs)		90 kg (198 lbs)	88 kg (194 lbs)	45 kg (99 lbs)	44 kg (97 lbs)	90 kg (198 lbs)	88 kg (194 lbs)		
Packing Unit	1									