

PABOOL PUMPS



Pabool Pumps are Designed for Sprinkler System & General Irrigation



SU-50H



Performance Curve

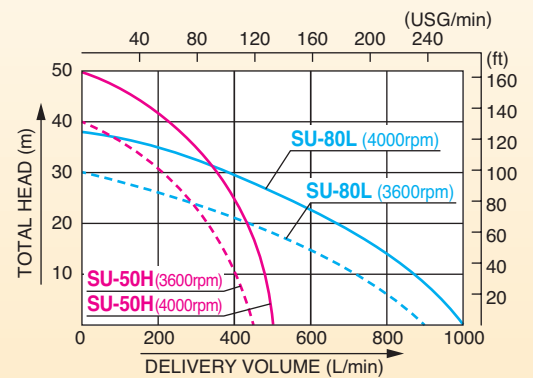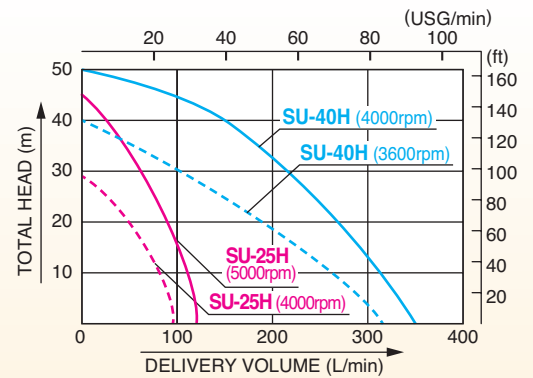

Specifications

Model	SU-25H		SU-40H		SU-50H		SU-80L	
Connection Dia	25 mm (1")		40 mm (1½")		50 mm (2")		80 mm (3")	
Connection Thread	Outer Pipe Thread BSP							
Revolution	4000 rpm	5000 rpm	3600 rpm	4000 rpm	3600 rpm	4000 rpm	3600 rpm	4000 rpm
Total Head	29 m (95 ft)	45 m (147 ft)	40 m (131 ft)	50 m (164 ft)	40 m (131 ft)	50 m (164 ft)	30 m (98 ft)	38 m (124 ft)
Max. Suction Lift	8 m (2.6ft)							
Delivery Volume	96 L/min (25 USG/min)	120 L/min (31 USG/min)	315 L/min (83 USG/min)	350 L/min (92 USG/min)	450 L/min (118 USG/min)	500 L/min (132 USG/min)	900 L/min (237 USG/min)	1000 L/min (264 USG/min)
Output	1.5 kW (2 PS)	2.2 kW (3 PS)	2.2 kW (3 PS)	3.7 kW (5 PS)	3.7 kW (5 PS)	5.5 kW (7.5 PS)	5.5 kW (7.5 PS)	7.5 kW (10 PS)
Standard Accessories	1 Strainer, 2 Coupling Sets, 3 Hose Bands							
Gross Weight	35 kg (77.1 lbs)		24 kg (52.9 lbs)		15 kg (33.0 lbs)		20.5 kg (45.1 lbs)	
Dimensions LxWxH (mm)	316 x 213 x 200		349 x 212 x 229		382 x 250 x 266		414 x 277 x 305	
Packing Unit	4		2		1		1	

Powerful Pressure & Enhanced Durability



SU-50V



Double Life Span Durability

Standard
type



SU-V
series

Mechanical Seal



SU-80V

Performance Curve

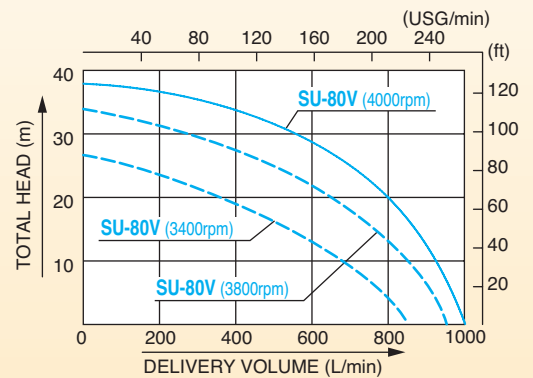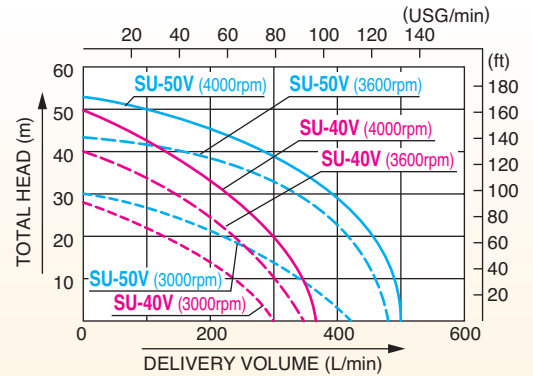

Specifications

Model	SU-40V			SU-50V			SU-80V		
Connection Dia	40 mm (1½")			50 mm (2")			80 mm (3")		
Connection Thread	Outer Pipe Thread BSP								
Revolution	3000 rpm	3600 rpm	4000 rpm	3000 rpm	3600 rpm	4000 rpm	3400 rpm	3800 rpm	4000 rpm
Total Head	28 m (91 ft)	40 m (131 ft)	50 m (164 ft)	30 m (98 ft)	42 m (137 ft)	53 m (173 ft)	27 m (88 ft)	34 m (111 ft)	38 m (124 ft)
Delivery Volume	300 L/min (79 USG/min)	350 L/min (92 USG/min)	370 L/min (98 USG/min)	430 L/min (113 USG/min)	480 L/min (127 USG/min)	500 L/min (132 USG/min)	850 L/min (224 USG/min)	950 L/min (251 USG/min)	1000 L/min (264 USG/min)
Max. Suction Lift	7 m (23 ft)	8 m (26 ft)		7 m (23 ft)	8 m (26 ft)		7 m (23 ft)	8 m (26 ft)	
Output	1.5 kW (2 PS)	2.2 kW (3 PS)	3.7 kW (5 PS)	2.2 kW (3 PS)	3.7 kW (5 PS)	5.5 kW (7.5 PS)	5.5 kW (7.5 PS)	7.5 kW (10 PS)	8.6 kW (11.5 PS)
Standard Accessories	1 Strainer, 2 Coupling Sets, 3 Hose Bands								
Gross Weight	13.5 kg (29.7 lbs)			16 kg (35.3 lbs)			24 kg (52.9 lbs)		
Dimensions LxWxH (mm)	360 × 212 × 240			392 × 250 × 280			434 × 277 × 378		
Packing Unit	1								