

# Great Durability for Muddy Water & Sea Water

## Strong Durability

- Sic (Silicon Carbide) Mechanical Seal
- Big size Bearings
- Oil chamber size is 6 times bigger than our current model, NSM

## Easy Maintenance

- Easy to replace condenser and Mechanical Seal
- Strainer can be removed without any tool




CP-59022

**Submersible Pump for Circulation Continuous Use, 1 Year!**



### Performance Curve

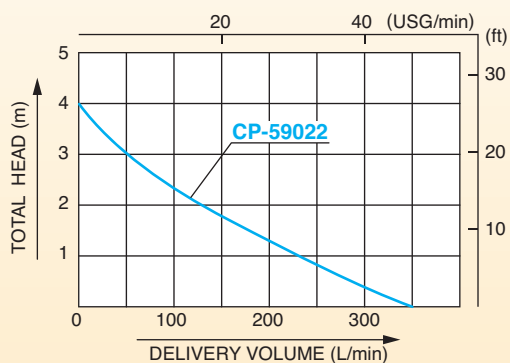

### Specifications

Model		CP-59022
PUMP	Connection Dia	90 mm (3.5")
	Total Head	4 m (12.8 ft)
	Delivery Volume	350 L/min (21 m <sup>3</sup> /H)
MOTOR	Voltage	AC 220 V
	Frequency	50 Hz
	Rated Current	2.0 A
	Revolution	2500 rpm
	Type	Induction Motor
	Power Cord	5 m (16.0 ft)
Standard Accessory		1 Delivery Flange
Gross Weight		5.6 kg (12.3 lbs)
Dimensions LxWxH (mm)		210 x 210 x 570
Packing Unit		1

# "PONDY" & "MARINE PET" Submersible Pump for Seawater

## ■ Applications

- Feeding or draining water in fish farms
- Washing purpose
- Draining bilge water





SK-2524



BL-2524N

## ■ Performance Curve

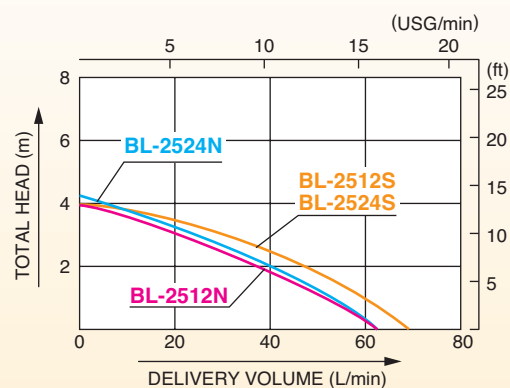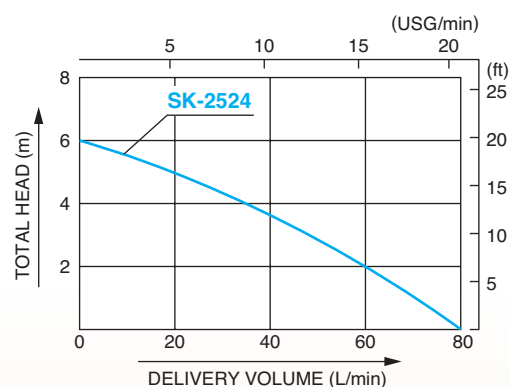

## ■ Specifications

Model		SK-2524	BL-2512S	BL-2524S	BL-2512N	BL-2524N
PUMP	Connection Dia	25 mm (1")				
	Total Head	6 m (19.6 ft)	4 m (13.1 ft)			4.2 m (13.8 ft)
	Delivery Volume	80 L/min (21 USG/min)	70 L/min (18 USG/min)		63 L/min (16 USG/min)	
MOTOR	Voltage	DC 24 V	DC 12 V	DC 24 V	DC 12 V	DC 24 V
	Frequency	—	—	—	—	—
	Rated Current	8.5 A	6.5 A	3.5 A	7.8 A	3.8 A
	Rating	Continuous				
	Output	123 W	45 W		50 W	
	Revolution	3200 rpm	5400 rpm		5800 rpm	
	Life Span	Approx. 500 hrs	Approx. 200 hrs		Approx. 500 hrs	
	Power Cord	5 m (16.4 ft)	2 m (6.5 ft)		2.95 m (9.7 ft)	
Standard Accessories	1 Coupling Set (φ25) 1 Hose Nipple (φ20) 1 Hose Band (φ25) 1 Hose Band (φ20) 1 Rope (5 m (16.4 ft))		—		1 Elbow	
Gross Weight	11 kg (24.2 lbs)	18.5 kg (40.7 lbs)		32 kg (70.5 lbs)		
Dimensions LxWxH (mm)	415 x 238 x 300	558 x 276 x 368		564 x 273 x 408		
Packing Unit	2			20		