KOSHIN

PONSTAR

PX-50

IMPROVED
MATERIAL
SUPERIOR
CONSTRUCTION

COMPACTINIDISCINIDISCINIDISCINIDISCINIDISCINIDISCINIDISCININI SIZE PERFORMANCE

New generation submersible pump-Invertible delivery flange feature






KOSHIN LTD.

Photo: PX-50

P PX-50

Excellent durability suitable for various purposes

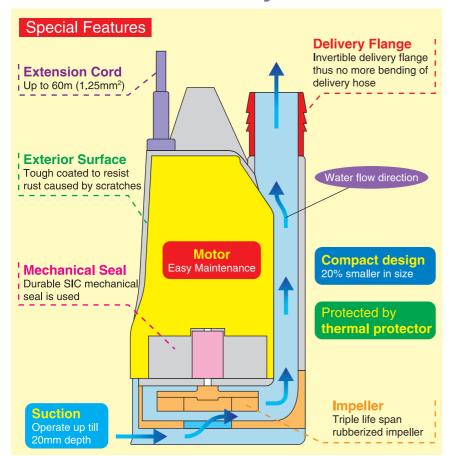


Triple life span due to special rubberized impeller as compared with cast iron impeller.



Suitable for

- Construction site
- Pond/aquarium usage
- Agricultural irrigation
- Home/domestic application

Performance curve



Just 2 bolts delivery flange is inverted.

Change delivery flange direction and delivery hose will never be bent again.

For the purpose of improvement, specifications are subject to changes without notice.

Specifications

Model		PX-55022	PX-65022
PUMP	Connection Dia	50m/m (2")	
	Total Head	10m	
	Delivery Volume	260 liters/min	
MOTOR	Voltage	AC-220V (180V~260V)	
	Frequency	50Hz	60Hz
	Out put	400W	
	Rated Current	3.2A	
	Consumption	620W	670W
	Revolution	2900rpm	3400rpm
	Model	Condenser Induction Motor	
	Power Cord	5m	
Standard Accessories		1 Hose Bands 1 Rope	
Gross Weight		25kg	
Dimension		258x500x424	

Condenser motor requires 3 times starting rated current.



