

"GEAR PUMPS"

Suitable for Water, Oil & Various Liquids Applications



GB-13
GC-13



GB-25
GC-25

■ Applications (GB)

- Water
- Sea water
- Weak acids
- Various chemicals
- Coal tar




■ Applications (GC)

- Kerosene
- Light oil
- Machine oil
- Heavy oil
- Water



■ Performance Curve

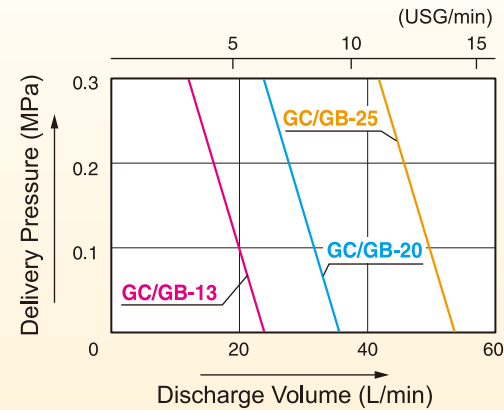

■ Specification

Model	GC-13	GB-13	GC-20	GB-20	GC-25	GB-25
Gear Material			GC: Cast Iron / GB: Brass			
Connection Dia	13 mm (½")		20 mm (¾")		25 mm (1")	
Discharge Volume (400 rpm)	21 L/min (5 USG/min)		37 L/min (9 USG/min)		55 L/min (14 USG/min)	
Delivery Pressure			0 – 0.3 MPa (0 – 3 kg/cm²)			
Max. Suction Lift			Max. 4 m (13.1 ft)			
Power	200 W		400 W		750 W	
Pulley	5" (125 mm) × A1		6" (150 mm) × A1		8" (200 mm) × A1	
Net Weight	4 kg (8.8 lbs) (1 unit)		6 kg (13.2 lbs) (1 unit)		11 kg (24.3 lbs) (1 unit)	
Gross Weight	17.5 kg (38.6 lbs) (4 units)		13 kg (28.7 lbs) (2 units)		22.5 kg (49.6 lbs) (2 units)	
Dimensions L×W×H (mm)	307 × 273 × 196	391 × 236 × 167	294 × 213 × 202		402 × 267 × 250	
Packing Unit	4				2	