

"PACO-PET" Plastic Syphon Pumps

■ Applications

- Kerosene
- Gasoline
- Diesel oil
- Solvent
- Water (Non-potable)

■ Specification

Model	PH-10	PH-20
Discharge Volume	6.7 L/min (1 USG/min)	11.5 L/min (3 USG/min)
Pump Length	517 mm (20")	613 mm (24")
Suction Pipe	385 mm	410 mm
Delivery Hose	545 mm	572 mm
Gross Weight	11.5 kg (25 lbs) (120 units)	6.8 kg (15 lbs) (40 units)
Dimensions L×W×H (mm)	680 × 330 × 603	800 × 355 × 350
Packing Unit	120	40




Plastic Pumps Operated by Dry Cell Battery

■ Applications

- Kerosene

**No
Overflow
Trouble**




(EP-305,
EP-305BC,
EP-305L)

Type AA



2 Batteries
(Not Included)

**Big Switch
for Easy
ON/OFF
Control**

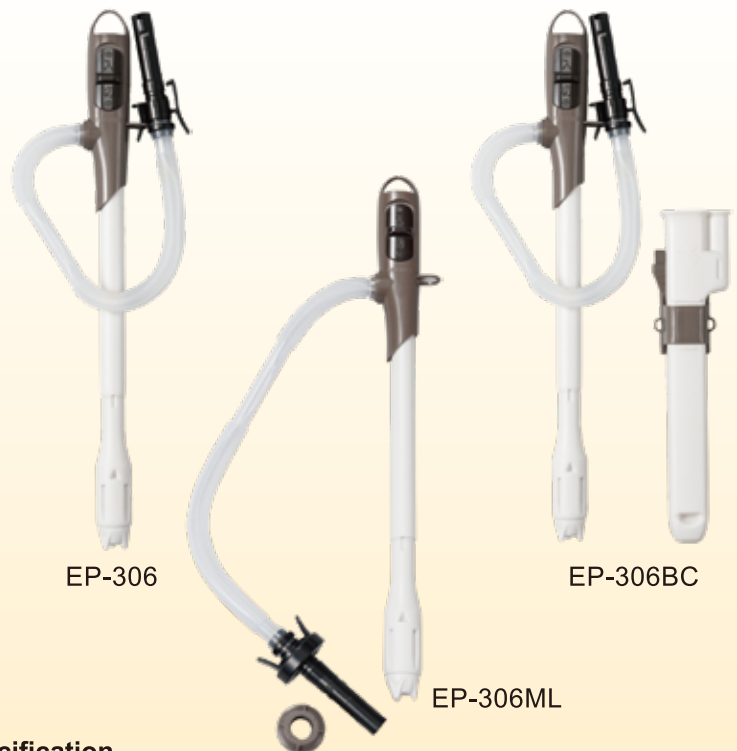

■ Specification

Model	EP-306	EP-306ML	EP-306BC
Delivery Hose		620 mm	
Connection dia Suction	20 mm	19.5 mm	20 mm
Connection dia Discharge		35 mm	
Discharge Volume		12 L/min	
Stop Sensor	○	○ (buzzer)	○
Power	2×1.5 V AA Batteries (Not Included)		
Gross Weight	6.1 kg	6.8 kg	5.1 kg
Dimensions L×W×H (mm)	300 × 290 × 585	305 × 315 × 585	290 × 280 × 615
Packing Unit	20	20	12

*EP-105 does not have auto stop function.