


Long Durability "REVOLVEX PUMP"


- Compact design and can be removed on the deck easily.
- Small and compact, but, large delivery volume for this class of pumps.
- Continuous running is available with motor fun.
- Dry prime pump, no need to prime with water, immediate suction.

**Easy to Remove
in The Ship**

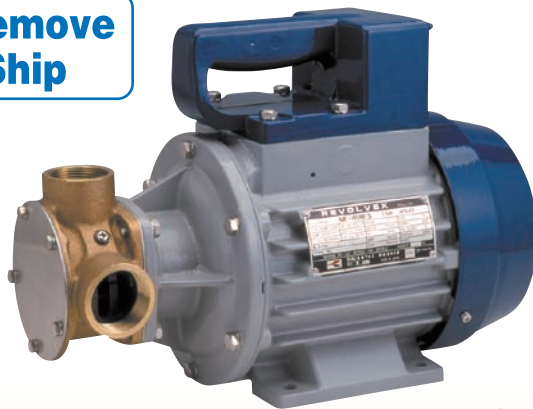

MF-40MS



**Easy to Replace
Carbon Brushes**

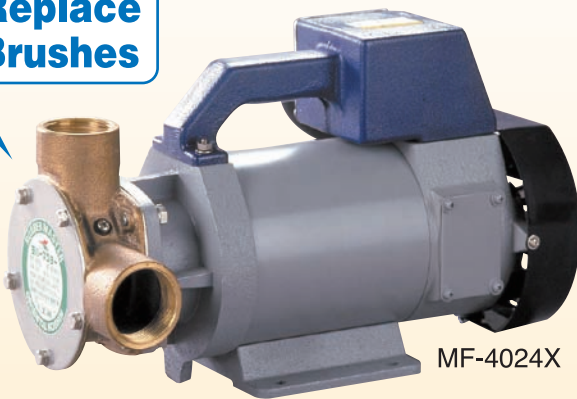

MF-4024X

* To transfer fuel, please use special impeller for oil. (Impeller type : MF-2524KN)
Please refer to page 51.

Performance Curve

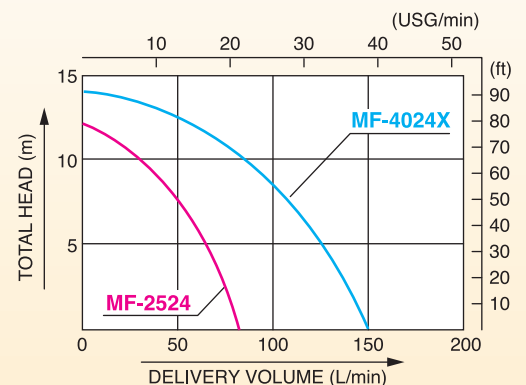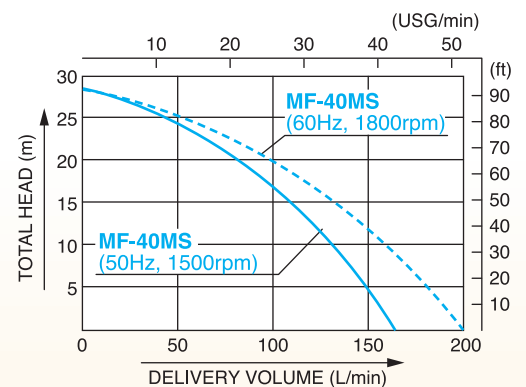

Specification

Model		MF-40MS	MF-2524	MF-4024X
PUMP	Connection Dia	40 mm (1½")	25 mm (1")	40 mm (1½")
	Connection Thread	Inner Pipe Thread		
	Material	Bronze Castings (Gunmetal)		
	Total Head	29 m (95 ft)	9 m (29.5 ft)	14 m (45.9 ft)
	Max. Suction Lift	5 m (16 ft)	3.5 m (11 ft)	
Delivery Volume	60 Hz : 200 L/min (52 USG/min)	80 L/min (21 USG/min)	150 L/min (39 USG/min)	
	50 Hz : 170 L/min (44 USG/min)			
MOTOR	Voltage	Three Phase 200 V		DC 24V
	Current	6.8 A / 50 Hz	6.0 A / 60 Hz	12 – 15 A
	Output	1.5 kW		250 W
	Power Cord	10 m (1.25 mm ²)		5 m (2 mm ²)
Standard Accessories	1 Strainer, 1 Hose Band (φ48)		1 Strainer, 2 Connecting Nipples (φ25), 3 Hose Bands (φ32)	1 Strainer, 1 Hose Band (φ48)
Net Weight	29.8 kg (66 lbs)		8.3 kg (18 lbs)	22 kg (49 lbs)
Gross Weight	34.2 kg (75 lbs)		8.8 kg (19.4 lbs)	22.7 kg (50 lbs)
Dimensions LxWxH (mm)	488 × 244 × 344		315 × 213 × 238	420 × 220 × 280
Packing Unit			1	