

"PONDY" & "MARINE PET" Submersible Pump for Seawater

■ Applications

- Feeding or draining water in fish farms
- Washing purpose
- Draining bilge water





SK-2524



BL-2524N

■ Performance Curve

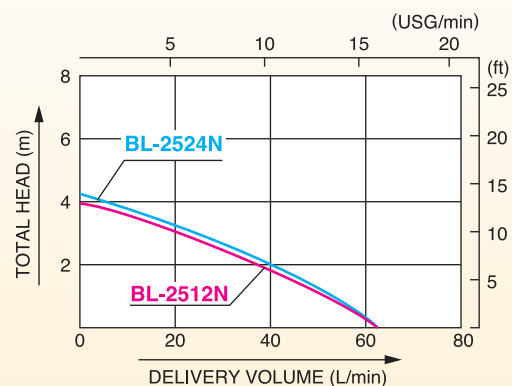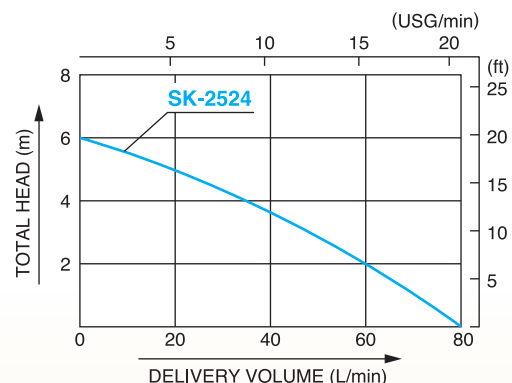

■ Specification

	Model	SK-2524	BL-2512N	BL-2524N
PUMP	Connection Dia		25 mm (1")	
	Total Head	6 m (19.6 ft)	4 m (13.1 ft)	4.2 m (13.8 ft)
	Delivery Volume	80 L/min (21 USG/min)	63 L/min (16 USG/min)	
MOTOR	Voltage	DC 24 V	DC 12 V	DC 24 V
	Frequency			
	Rated Current	8.5 A	7.8 A	3.8 A
	Rating		Continuous	
	Output	123 W		50 W
	Revolution	3000 rpm		5800 rpm
	Life Span	Approx. 500 hrs		Approx. 500 hrs
	Power Cord	5 m (16.4 ft)		2.95 m (9.7 ft)
Standard Accessories	1 Coupling Set (φ25) 1 Hose Nipple (φ20) 1 Hose Band (φ25) 1 Hose Band (φ20) 1 Rope (5 m (16.4 ft))		1 Elbow	
Net Weight	5.5 kg (12.2 lbs) (1 unit)		1.3 kg (2.2 lbs) (1 unit)	
Gross Weight	11 kg (24.2 lbs) (2 units)		32 kg (70.5 lbs) (20 units)	
Dimensions LxWxH (mm)	415 × 238 × 300		564 × 273 × 408	
Packing Unit	2		20	