


PERFORMANCE CURVE

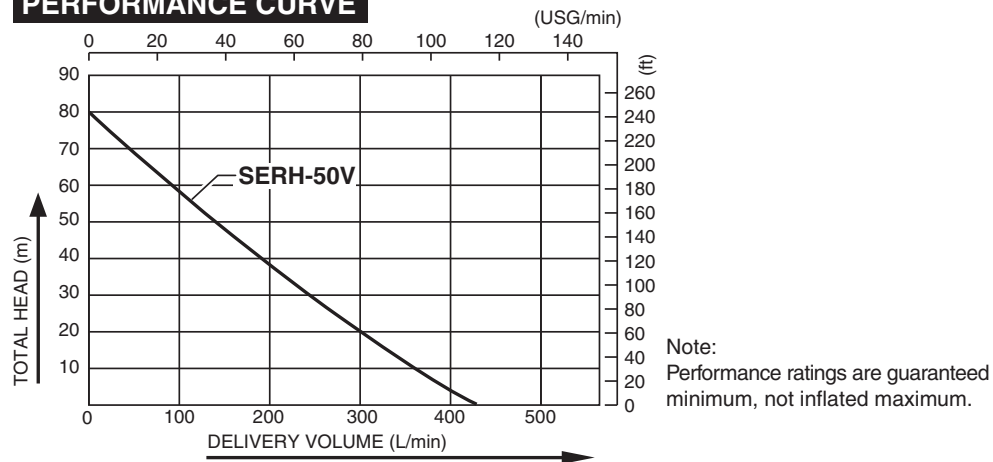

SPECIFICATIONS

Model		SERH-50V	
PUMP	Connection Diameter	2" (50 mm) / 1" (25 mm)	
	Connection Thread	NPT	
	Total Head	262 ft (80 m)	
	Delivery Volume	114 USG/min (430 L/min)	
	Max. Suction Head	26 ft (8 m)	
ENGINE	Model	Honda GX160 Hi-Revolution Forced Air Cooling 4-Stroke Gasoline Engine	
	Exhaust Volume	163 cc	
	Horse Power	Rated Power	2.9kW(3.9PS) / 3600rpm
		Max. Power	3.6kW(4.9PS) / 3600rpm
	Max. Speed	4800 rpm	
	Fuel	Automotive Unleaded Gasoline	
	Fuel Tank capacity	0.82 USG (3.1 L)	
	Continuous Operating Time	Approx. 2 hours	
	Starting Method	Recoil starter	
	Standard Accessories	1 Coupling Set (50 mm), 1 Check Plate (50 mm), 2 Nipples (25 mm), 1 Engine Tool	
Net Weight	75 lbs (34 kg)		

For the purpose of improvement, specifications are subject to changes without notice.

SPARE PARTS



For spareparts information, visit




<http://www.koshinpump.com>

COUPLING SET

2-ways of using this coupling set:

- A** Without check plate for normal delivery application.
- B** With check plate to close delivery.

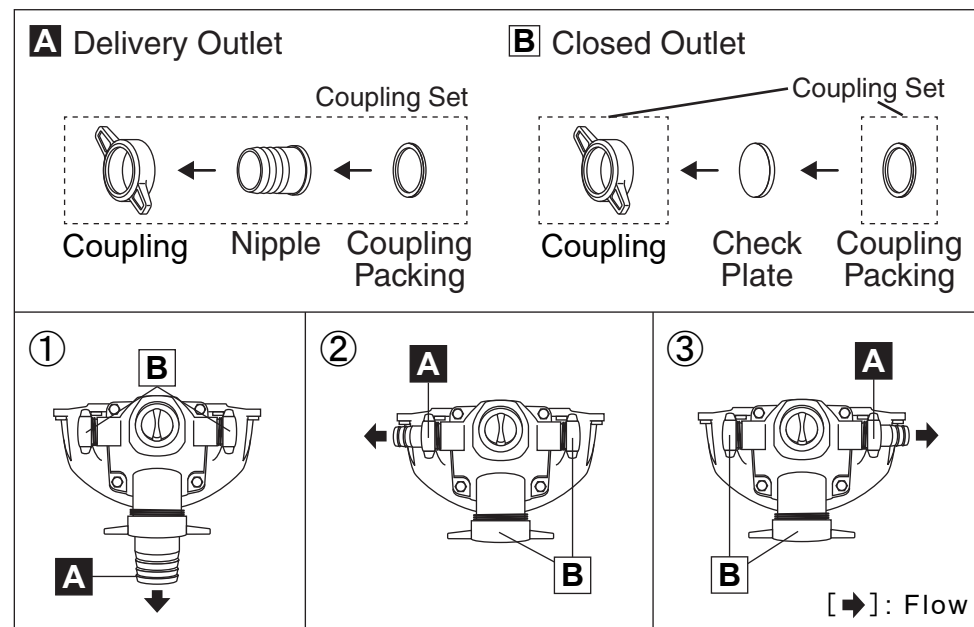

NOMENCLATURE

