


K

这个文件只用于内容确认，不能用于印刷。
 印刷是请一定使用AI文件。
 このデータは内容確認用であり、印刷に使用するデータではありません。
 印刷は必ずAIデータを使用してください。
 This data is for sure the contents, not the data be used for printing.
 When you make a print, please use the AI data always.

PERFORMANCE CURVE

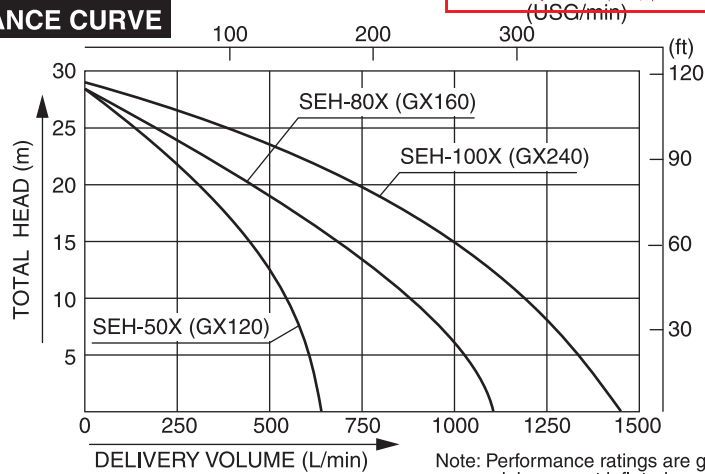

Note: Performance ratings are guaranteed minimum, not inflated maximum.

SPECIFICATIONS

Model			SEH-50X	SEH-80X	SEH-100X	
PUMP	Connection Dia		50 mm (2")	80 mm (3")	100 mm (4")	
	Connection Thread		Parallel Pipe Thread		Parallel Pipe Thread Fire Hose Coupling Screw	
	Total Head	typeA	FC	27 m (88 ft)	27 m (88 ft)	28 m (91 ft)
		typeB	ADC	30 m (98 ft)		
	Delivery Volume	typeA	FC	640 L/min (169 USG/min)	1100 L/min (290 USG/min)	1450 Lmin (383 USG/min)
typeB		ADC	600 L/min (158 USG/min)			
Max. Suction Head			8 m (26 ft)			
ENGINE	Model		HONDA GX120	HONDA GX160	HONDA GX240	
			Forced Air-cooled 4-stroke Gasoline Engine			
	Exhaust Volume		122 cc	163 cc	270 cc	
	Output	Rated Power	2.1 kW (2.9 PS)/3600 rpm	2.9 kW (3.9 PS)/3600 rpm	4.6 kW (6.3 PS)/3600 rpm	
		Max. Power	2.4 kW (3.3 PS)/3600 rpm	3.6 kW (4.9 PS)/3600 rpm	5.9 kW (8.0 PS)/3600 rpm	
	Fuel		Automotive Unleaded Gasoline			
	Fuel Tank Capacity		2.0 L (0.53 USG)	3.1 L (0.82 USG)	5.3 L(1.40 USG)	
	Continuous Operating Time		2 hrs		2.5 hrs	
Starting Method		Recoil Starter				
Standard Accessories			1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set			
Net Weight			21 kg	28 kg	54kg	

For the purpose of improvement, specifications are subject to changes without notice.