


K

这个文件只用于内容确认，不能用于印刷。  
印刷是请一定使用AI文件。

このデータは内容確認用であり、印刷に使用するデータではありません。  
印刷は必ず AI データを使用してください。

This data is for sure the contents, not the data be used for printing.  
When you make a print, please use the AI data always.

PERFORMANCE CURVE

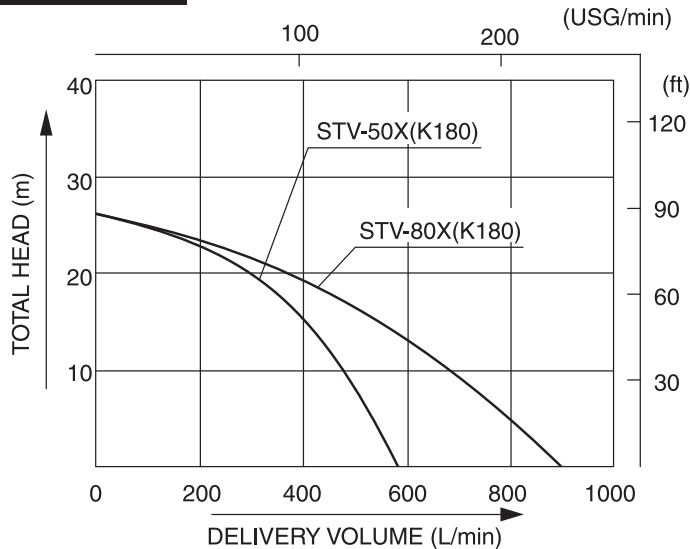

Note: Performance ratings are guaranteed minimum, not inflated maximum.

SPECIFICATIONS

Model		STV-50X	STV-80X
PUMP	Connection Dia	2" (50mm)	3" (80mm)
	Connection Thread	BSP Thread	
	Total Head	26m (85ft)	
	Delivery Volume	580L/min (153USG/min)	900L/min (238USG/min)
	Max. Suction Head	8m (26ft)	
ENGINE	Model	K180 F orced Air Cooled 4 Cycle Gasoline Engine	
	Exhaust Volume	179cc	
	Output	3.1kW (4.2PS)/3600rpm	
	Fuel	Automobile unleaded Gasoline	
	Fuel Tank capacity	3.6L (0.95gal)	
	Continuous Operating Time	Approx. 2 hrs	Approx. 1.6 hrs
	Starting Method	Recoil Starter	
	Standard Accessories	2 Coupling Sets, 1 Strainer, 3 Hose Bands, 1 Wrench, 1 Engine Tool Set	
Net Weight		29.0kg (63lb)	30.9kg (68lb)

\*For the purpose of improvement, specifications are subject to changes without notice.  
\*Self-priming performance may decrease due to atmospheric pressure or outside air temperature.  
If self-priming lift is not enough, add priming water to pump casing.