



NOMENCLATURE

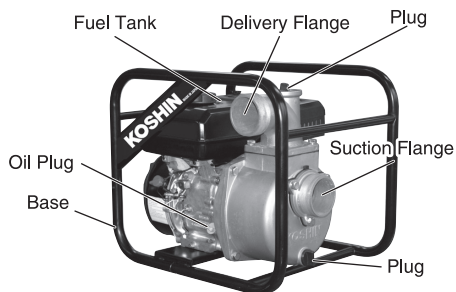

PERFORMANCE CURVE

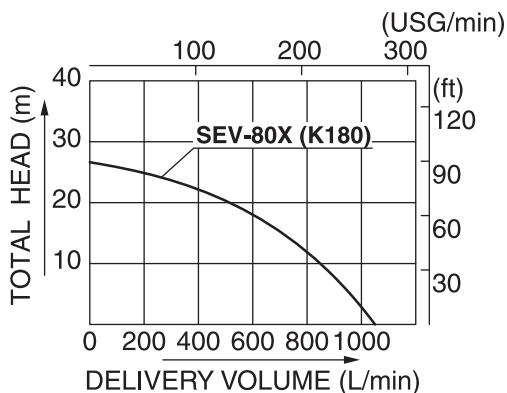

Note : Performance ratings are guaranteed minimum, not inflated maximum.

SPECIFICATIONS

Model			SEV-80X
PUMP	Connection Dia		80 mm (3")
	Connection Thread		Fire Fighting Thread
	Total Head		27 m (88 ft)
	Delivery Volume		1050 L/min (277 USG/min)
	Max. Suction Head		8 m(26ft)
ENGINE	Model		K180 Forced Air-cooled 4-stroke Gasoline Engine
	Exhaust Volume		179 cc
	Output	Rated Power	3.1kW(4.2PS)/3600rpm
	Fuel		Automotive Unleaded Gasoline
	Fuel Tank Capacity		3.6 L
	Continuous Operating Time		Approx. 2.4 hrs
	Starting Method		Recoil Starter
	Net Weight		28.7 kg (63.2 lb)
	Gross Weight		30.7 kg (67.6 lb)
	Standard Accessories		2 Cupling Set, 1 Strainer, 3 Hose Bands, 1 Engine Tool Set

*For the purpose of improvement, specifications are subject to changes without notice.

*Self-priming performance may decrease due to atmospheric pressure or outside air temperature.

If self-priming lift is not enough, add priming water to pump casing.