



## NOMENCLATURE

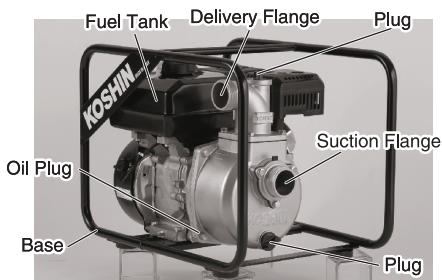

## PERFORMANCE CURVE

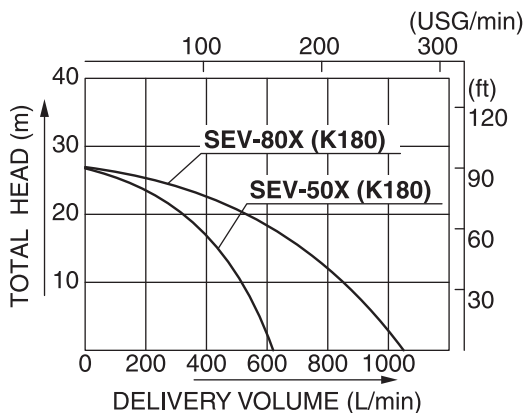

Note : Performance ratings are guaranteed minimum, not inflated maximum.

## SPECIFICATIONS

Model		SEV-50X	SEV-80X
PUMP	Connection Dia	50 mm (2")	80 mm (3")
	Connection Thread	BSP Thread	
	Total Head	27 m (88 ft)	
	Delivery Volume	620 L/min (163 USG/min)	1050 L/min (277 USG/min)
	Max. Suction Head	8 m(26ft)	
ENGINE	Model	K180	
		Forced Air-cooled 4-stroke Gasoline Engine	
	Exhaust Volume	179 cc	
	Output	3.1kW(4.2PS)/3600rpm	
	Rated Power		
	Fuel	Automotive Unleaded Gasoline	
	Fuel Tank Capacity	3.6 L	
	Continuous Operating Time	Approx. 2.6 hrs	Approx. 2.4 hrs
	Starting Method	Recoil Starter	
	Net Weight	25.2 kg (55.5 lb)	28.7 kg (63.2 lb)
	Gross Weight	27.2 kg (59.9 lb)	30.7 kg (67.6 lb)
	Standard Accessories	1 Strainer, 3 Hose Bands, 1 Engine Tool Set	

\*For the purpose of improvement, specifications are subject to changes without notice.

\*Self-priming performance may decrease due to atmospheric pressure or outside air temperature.

If self-priming lift is not enough, add priming water to pump casing.