


Up to 50% Fuel Saving & Noise Reduction* Double Life Span

* Fuel consumption and engine noise are half of 2-stroke engine.




Performance Curve

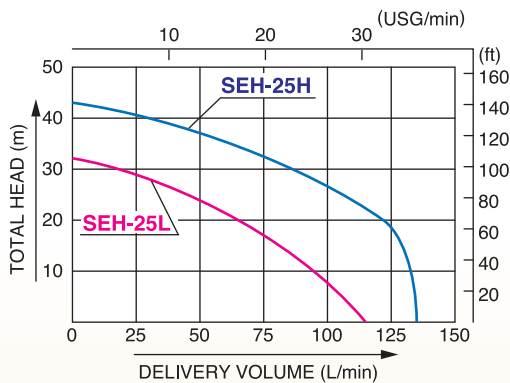

SEH-25H

SEH-25L

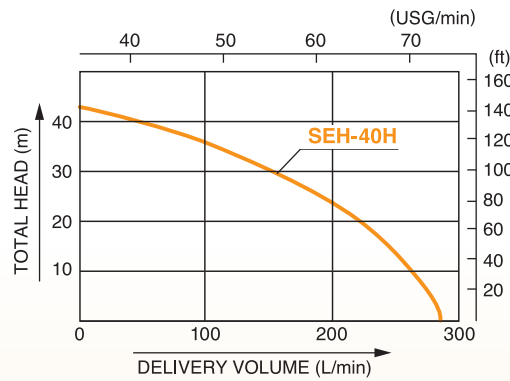

Available 25 mm Hose Set

N-Type Hose Set

- Washing of agriculture & construction machinery



- 1 Discharge hose <8 m (26 ft)>
- 1 Nozzle (Jet)

R-Type Hose Set

- Washing of agriculture machinery
- Water sprinkling to the field



- 1 Discharge hose <8 m (26 ft)>
- 1 Nozzle (Jet & Mist)

New Spray Nozzle



SJ-20

- Large volume of spraying water
- 1 Coupling set <20 mm (3/4")>
- 1 Hose nipple <20 mm (3/4") x 15 mm (1/2")>



Specifications



Model		SEH-25L	SEH-25H	SEH-40H
PUMP	Connection Dia	25 mm (1")		40 mm (1½")
	Connection Thread	Outer Pipe Thread BSP		
	Total Head	32 m (105 ft)	43 m (141 ft)	43 m (141 ft)
	Delivery Volume	115 L/min (30 USG/min)	135 L/min (36 USG/min)	280 L/min (73 USG/min)
	Max. Suction Lift	8 m (26 ft)		
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine		
	Model	Honda GX25	Honda GXH50	
	Exhaust Volume	25 cc	49 cc	49.4 cc
	Rated Output	—		
	Max. Output	0.72 kW (1.0 PS) / 7000 rpm	1.6 kW (2.2 PS) / 7000 rpm	1.6 kW (2.2 PS) / 7000 rpm
	Fuel	Automotive Unleaded Gasoline		
	Fuel Tank Capacity	0.58 L (0.15 USG)	0.77 L (0.20 USG)	
	Continuous Operating Time	Approx. 1 hrs		Approx. 2 hrs
	Starting Method	Recoil Starter		
	Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set		
Net Weight	5 kg (11.0 lbs)	12 kg (26.5 lbs)	11.5 kg (25.4 lbs)	
Gross Weight	7 kg (15.4 lbs)	13.5 kg (29.7 lbs)		
Dimensions LxWxH (mm)	375 x 243 x 320	385 x 311 x 453	405 x 302 x 447	
Packing Unit	1			

Complete Range of Water Pumps Powered by Honda Engine

- Highly effective Mechanical Seal made with special Carbon Ceramics provides extra durability.
- Entire unit is protected by sturdy Rollover Pipe Frame.
- Strong and lightweight die-cast Aluminum Pump.



Performance Curve

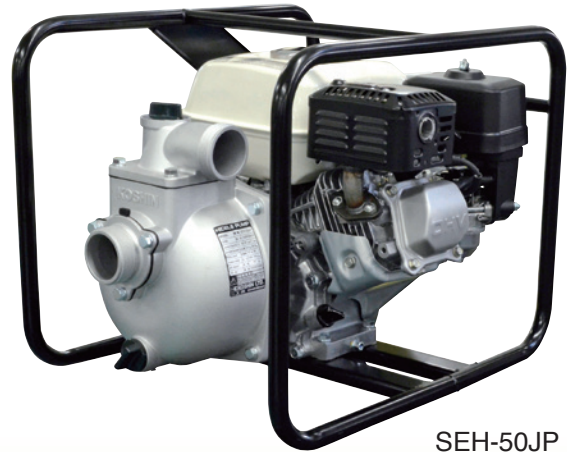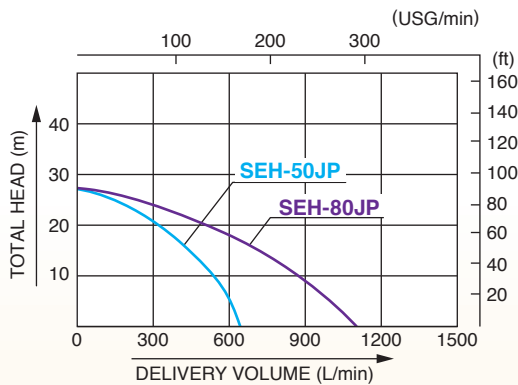

SEH-50JP



SEH-80JP

Specifications



Model		SEH-50JP	SEH-80JP
PUMP	Connection Dia	50 mm (2")	
	Connection Thread	Outer Pipe Thread BSP	
	Total Head	27 m (88 ft)	
	Delivery Volume	640 L/min (169 USG/min)	1100 L/min (290 USG/min)
	Max. Suction Lift	8 m (26 ft)	
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine	
	Model	Honda GP160	
	Exhaust Volume	163 cc	
	Rated Output	2.9 kW (3.9 PS) / 3600 rpm	
	Max. Output	3.6 kW (4.9 PS) / 3600 rpm	
	Fuel	Automotive Unleaded Gasoline	
	Fuel Tank Capacity	3.1 L (0.8 USG)	
	Continuous Operating Time	Approx. 2.5 hrs	Approx. 2.2 hrs
	Starting Method	Recoil Starter	
	Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set	
Net Weight	24 kg (52.9 lbs)	27.3 kg (60.2 lbs)	
Gross Weight	26 kg (57.3 lbs)	30 kg (66.0 lbs)	
Dimensions LxWxH (mm)	504 × 401 × 406	525 × 389 × 458	
Packing Unit	1		

Complete Range of Water Pumps Powered by Honda Engine

- Highly effective Mechanical Seal made with special Carbon Ceramics provides extra durability.
- Entire unit is protected by sturdy Rollover Pipe Frame.
- Strong and lightweight die-cast Aluminum Pump.



Performance Curve

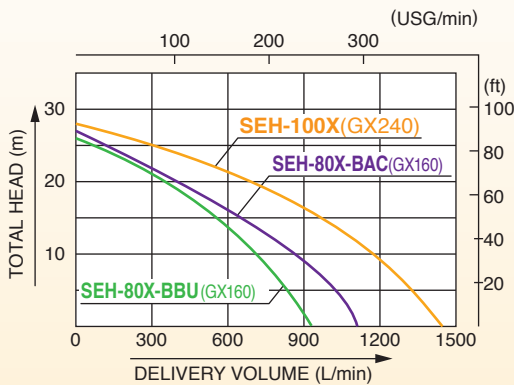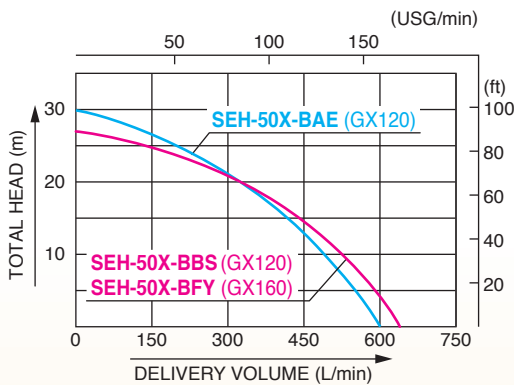

SEH-50X



SEH-80X

Specifications

Model	SEH-50X-BAE	SEH-50X-BBS	SEH-50X-BFY	SEH-80X-BBU	SEH-80X-BAC	SEH-100X
Connection Dia	50 mm (2")			80 mm (3")		100 mm (4")
Connection Thread	Outer Pipe Thread BSP					
Total Head	30 m (98 ft)	27 m (88 ft)		26 m (85 ft)	27 m (88 ft)	28 m (92 ft)
Delivery Volume	600 L/min (158 USG/min)	640 L/min (169 USG/min)		930 L/min (246 USG/min)	1100 L/min (290 USG/min)	1450 L/min (383 USG/min)
Max. Suction Lift	8 m (26 ft)					
Impeller	FC200					
Volute Casing	ADC12	FC200		ADC12	FC200	
Type	Forced Air-cooled 4-stroke Gasoline Engine					
Model	Honda GX120			Honda GX160		Honda GX240
Exhaust Volume	122 cc			163 cc		270 cc
Rated Output	2.1 kW (2.9 PS) / 3600 rpm			2.9 kW (3.9 PS) / 3600 rpm		4.6 kW (6.3 PS) / 3600 rpm
Max. Output	2.4 kW (3.3 PS) / 3600 rpm			3.6 kW (4.9 PS) / 3600 rpm		5.9 kW (8.0 PS) / 3600 rpm
Fuel	Automotive Unleaded Gasoline					
Fuel Tank Capacity	2.0 L (0.53 USG)			3.1 L (0.82 USG)		5.3 L (1.4 USG)
Continuous Operating Time	Approx. 2 hrs					Approx. 2.5 hrs
Starting Method	Recoil Starter					
Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set					
Net Weight	21 kg (46.3 lbs)	21 kg (46.3 lbs)	25.2 kg (56.2 lbs)	27 kg (59.5 lbs)	28 kg (61.7 lbs)	54 kg (119 lbs)
Gross Weight	22 kg (48.5 lbs)	23 kg (50.7 lbs)	27.2 kg (50.0 lbs)	30 kg (66.0 lbs)		59 kg (130 lbs)
Dimensions LxWxH (mm)	483 x 375 x 376		504 x 401 x 406	525 x 389 x 458		680 x 490 x 675
Packing Unit	1					