


# Strong & Durable Robin(CC) Engine

- Highly effective Mechanical Seal made with special Carbon Ceramics provides extra durability.
- Entire unit is protected by sturdy Rollover Pipe Frame.
- Strong and lightweight die-cast Aluminum Pump.




**New**

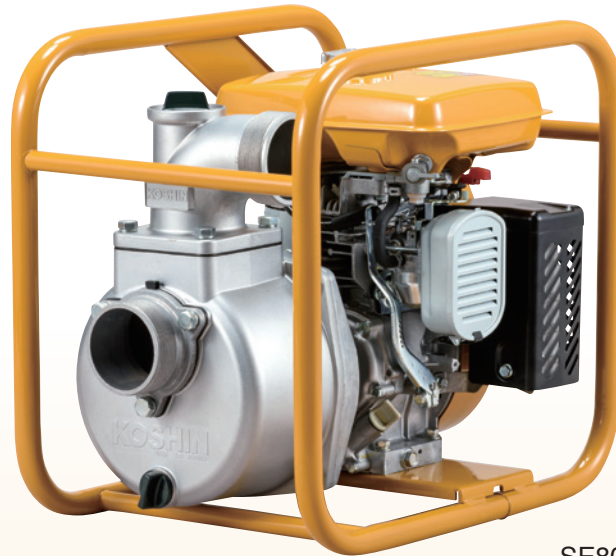

SE80X

## Performance Curve

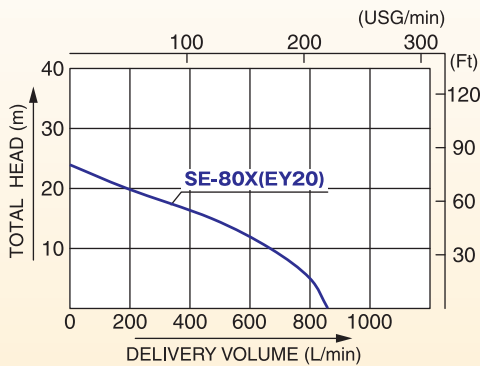

## Specifications

Model		SE-80X
PUMP	Connection Dia	80mm(3")
	Connection Thread	Outer Pipe Thread BSP
	Total Head	24 m (78 ft)
	Delivery Volume	860 L/min (227 USG/min)
	Max.Suction Lift	8m (26 ft)
ENGINE	Type	Forced Air-Cooled 4-stroke OHV Gasoline Engine
	Model	Robin (CC) EY20
	Exhaust Volume	183 cc
	Rated Output	2.6 kW (3.5PS) / 3600 rpm
	Max.Output	3.7 kW (5.0PS) / 4000 prm
	Fuel	Automotive Unleaded Gasoline
	Fuel Tank Capacity	3.8 L (1.1USG)
	Continuous Operating Time	Approx. 3 hrs
	Starting Method	Recoil Starter
Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set	
Net Weight	28 kg (61.7 lbs)	
Gross Weight	30.1 kg (66.4 lbs)	
Dimensions LxWxH (mm)	525 × 370 × 472	
Packing Unit	1	