
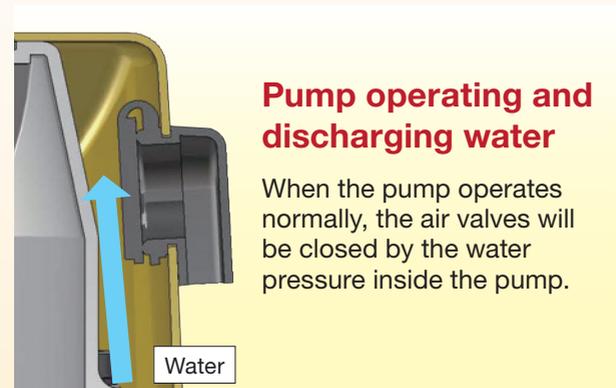


HEAVY DUTY CONTRACTOR PUMPS


POWERFUL PERFORMANCE! PONSTAR PBX Series

Feature 1 Trouble free operation, even in low water or dry-run situations!
With air valve function

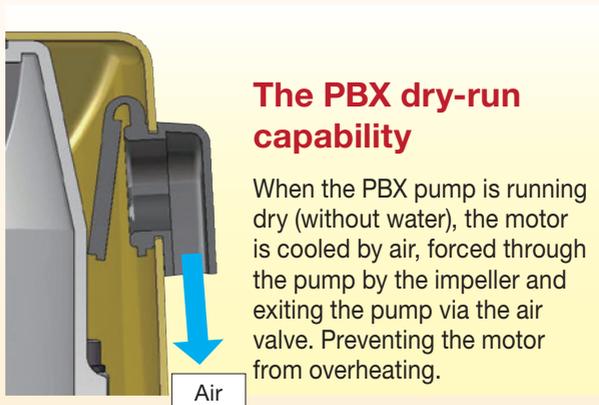

Feature 2 Extra Powerful Startup Torque!
The Koshin centrifugal force switch

Starting torque

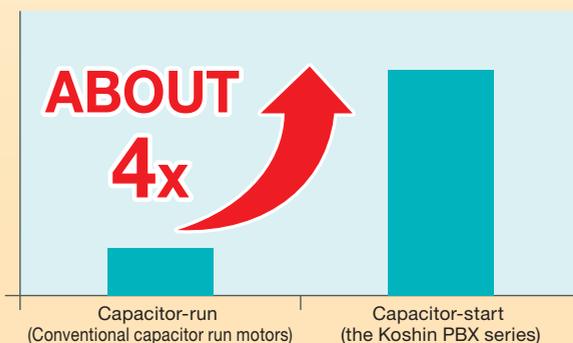


Feature 3 Designed specifically for use in muddy and sandy water, using strong and durable materials



PBX-55022

Solid Sizes




Optional parts

Float switch

When fitted with a (separately available) float switch, the pump can operate fully automatic.




Performance Curve

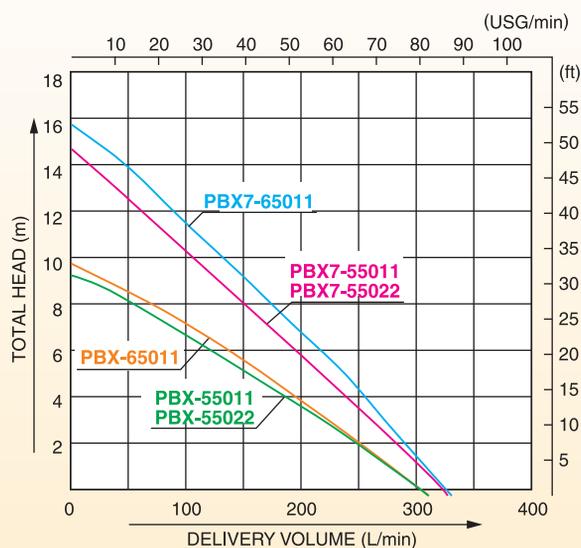

Effective Motor Cooling System

Water is channeled through the outer wall to cool the motor for maximum endurance.



Specifications

	Model	PBX-55022	PBX-55011	PBX-65011	PBX7-55022	PBX7-55011	PBX7-65011	
PUMP	Connection Dia	50 mm (2")						
	Total Head	9.5 m (31 ft)		10 m (32.8 ft)	15 m (50 ft)		16 m (54 ft)	
	Delivery Volume	310 L/min (4,870 GPH)			330 L/min (5,240 GPH)			
MOTOR	Voltage	AC 220 V		AC 110 V		AC 220 V		
	Frequency	50 Hz		60 Hz		50 Hz		
	Rated Current	4.2 A	8.1 A	8.7 A	6.0 A	12.0 A		
	Output	400 W			750 W			
	Consumption	680 W	690 W	750 W	1,250 W			
	Revolution	2800 rpm		3200 rpm		2800 rpm		3200 rpm
	Type	Condenser Induction Motor						
Power Cord	6 m (19.7 ft) or 10 m (32.8 ft)							
Net Weight	15 kg (33 lbs)	15.5 kg (34 lbs)	15 kg (33 lbs)	15.5 kg (34 lbs)	15.5 kg (34 lbs)	16.5 kg (36 lbs)		
Gross Weigh	16 kg (35 lbs)	16.5 kg (36 lbs)	16 kg (35 lbs)	16.5 kg (36 lbs)	16.5 kg (36 lbs)	17.5 kg (37 lbs)		
Dimensions LxWxH (mm)	245 x 245 x 450							
Packing Unit	1							

Great Durability

- Pump up to 20mm
- Easy maintenance



PX-55022

For Residual Water Up to 1 mm

- Designed for application in narrow access drainage especially in manhole or bottom pit.




PXL-52522

Applications

- Drainage of underground water
- Disposal of residual water from roof tank of buildings, swimming pools, etc.
- Construction site
- Pond / Aquarium usage
- Irrigation
- Home / Domestic application

*For clear water solid can't be handled

Performance Curve

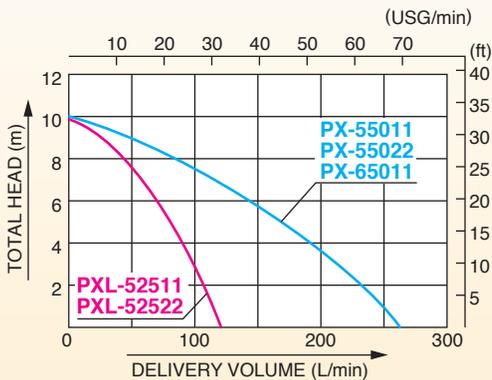

*Starting current is three times higher than rated current.

Invertible Delivery Flange

Just 2 bolts delivery flange is inverted



Specifications

Model		PX-55011	PX-55022	PX-65011	PXL-52511	PXL-52522
PUMP	Connection Dia	50 mm (2")			25 mm (1")	
	Total Head	10 m (32.8 ft)			10 m (32.8 ft)	
	Delivery Volume	260 L/min (68 USG/min)			120 L/min (31 USG/min)	
MOTOR	Voltage	AC 110 V	AC 220 V	Single 110 V	AC 110 V	AC 220 V
	Frequency	50 Hz		60 Hz	50 Hz	
	Rated Current	6.5 A	3.2 A	6.5 A	6.0 A	2.9 A
	Output	400 W			400 W	
	Consumption	580 W	620 W	700 W	590 W	540 W
	Revolution	2900 rpm		3400 rpm	2900 rpm	
	Type	Condenser Induction Motor				
	Power Cord	10 m (32.8 ft)	5 m (16.4 ft)	6 m (19.7 ft)	10 m (32.8 ft)	
Standard Accessories		1 Hose Band, 1 Rope (5 m (16.4 ft)), 1 Hose Nipple		1 Rope (5 m (16.4 ft))	1 Hose Band, 1 Hose Nipple, 1 Coupling, 1 Coupling Packing, 1 Rope (5 m (16.4ft))	
Net Weight		11 kg (24.2 lbs)			12.7 kg (28 lbs)	
Gross Weight		25 kg (55.1 lbs)			30 kg (66.1 lbs)	
Dimensions LxWxH (mm)		490 x 248 x 409	490 x 248 x 409	508 x 259 x 380	505 x 260 x 417	
Packing Unit		2				