

Triple Life Span Impeller Compared with Former Product

•Durable and long life time

Impeller is manufactured from a blended rubber compound providing maximum wear resistance up to three times over cast iron.

Maximal life-span and super hard mechanical seal.




New



PQ-55022

■ Performance Curve

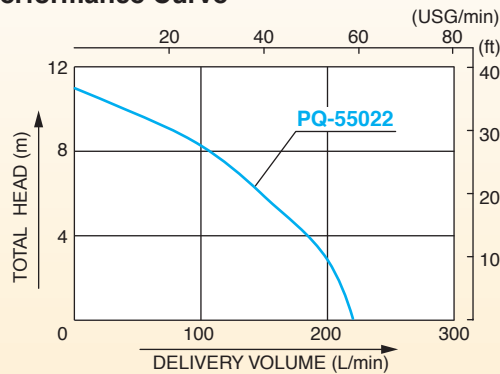

■ Specifications

Model		PQ-55022
PUMP	Connection Dia	50 mm (2")
	Total Head	11 m (36.1 ft)
	Delivery Volume	220 L/min (58 USG/min)
MOTOR	Voltage	AC 220 V
	Frequency	50 Hz
	Rated Current	2.7 A
	Output	400 W
	Consumption	550 W
	Revolution	2800 rpm
	Type	Condenser Induction Motor
	Power Cord	5 m (16.4 ft)
Standard Accessories		1 Hose Band, 1 Rope (5 m (16.4 ft))
Net Weight		11.5 kg (24.5 lbs)
Gross Weight		12.5 kg (27.5 lbs)
Dimensions LxWxH (mm)		245 x 205 x 410
Packing Unit		1