

"PONDY" & "MARINE PET" Submersible Pump for Seawater

■ Applications

- Feeding or draining water in fish farms
- Washing purpose
- Draining bilge water





SK-2524



BL-2524N

■ Performance Curve

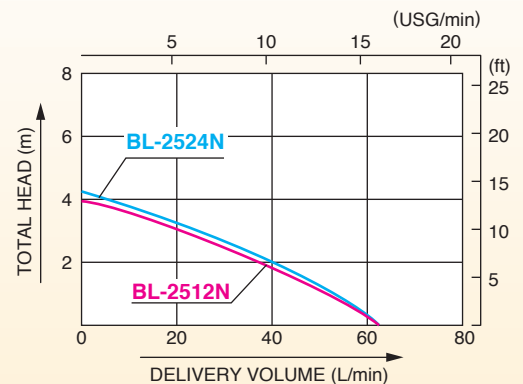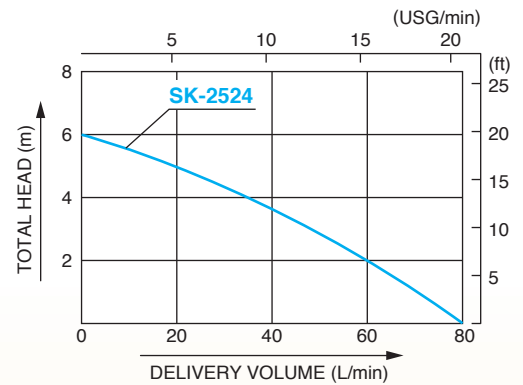

■ Specifications

Model		SK-2524	BL-2512N	BL-2524N
PUMP	Connection Dia		25 mm (1")	
	Total Head	6 m (19.6 ft)	4 m (13.1 ft)	4.2 m (13.8 ft)
	Delivery Volume	80 L/min (21 USG/min)		63 L/min (16 USG/min)
MOTOR	Voltage	DC 24 V	DC 12 V	DC 24 V
	Frequency	—	—	—
	Rated Current	8.5 A	7.8 A	3.8 A
	Rating	Continuous		
	Output	123 W		50 W
	Revolution	3000 rpm		5800 rpm
	Life Span	Approx. 500 hrs		Approx. 500 hrs
	Power Cord	5 m (16.4 ft)		2.95 m (9.7 ft)
	Standard Accessories	1 Coupling Set (φ25) 1 Hose Nipple (φ20) 1 Hose Band (φ25) 1 Hose Band (φ20) 1 Rope (5 m (16.4 ft))		1 Elbow
Net Weight	5.5 kg (12.2 lbs)		13 kg (29.1 lbs)	
Gross Weight	11 kg (24.2 lbs)		32 kg (70.5 lbs)	
Dimensions L×W×H (mm)	415 × 238 × 300		564 × 273 × 408	
Packing Unit	2		20	