




## Durable and High Performance Generator

- High Fuel Efficiency
- Ultimate Durability
  - 100% Copper Wire for Alternator
  - Anti-Rusty fuel tank
  - Full roll cage for ultimate protection
- Less Vibration & Quiet Operation

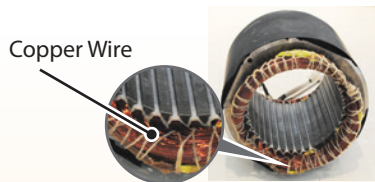

# KOSHIN Engine




GV-3000

•All models have oil alert function.




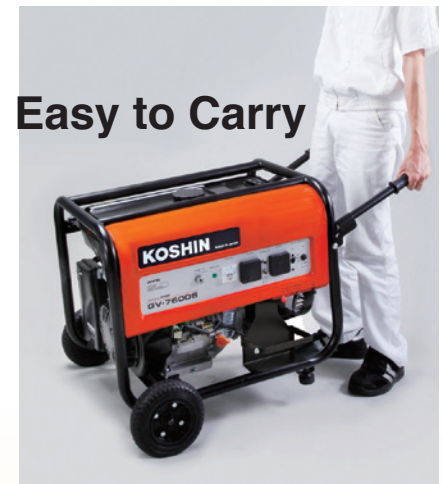


GV-7600S



GV-7600S

## Specifications

Model		GV-3000	GV-7000S	GV-3200	GV-7600S
GENERATOR	Phase	Single			
	Voltage Regulation	AVR			
	Rated Output	2kVA	5kVA	2.3kVA	5.5kVA
	Maximum Output	2.2kVA	5.5kVA	2.5kVA	6kVA
	AC Rated Frequency	50 Hz		60 Hz	
	Rated Voltage	220V			
	Rated Ampere	9.1A	22.7A	10.5A	25A
	DC Output	12V/8.3A			
	Continuous Running Time rated load	9.5h	7.5h	6.3h	5h
	Tank Capacity	12.6L	22.6L	12.6L	22.6L
Receptacle	 European socket, CEE 7/4, 2pcs	 European socket, CEE 7/4, 1pc NEMA L6-30 Socket, 1pc	 BS1363, 2pcs OR CEE 7/4, 2pcs	 BS1363, 2pcs OR CEE 7/4 NEMA L6-30	
ENGINE	Model	Koshin K210	Koshin K420	Koshin K210	Koshin K420
	Type	Air-cooled, 4-stroke, OHV, single cylinder			
	Exhaust Volume	212cc	420cc	212cc	420cc
	Oil Alert System	Standard			
	Starting system	Recoil	Recoil/Electric starter	Recoil	Recoil/Electric starter
	Battery	—	Maintenance-free type	—	Maintenance-free type
Wheel Kit	—	Standard	—	Standard	
Net Weigh	42 kg (93 lbs)	85 kg (187 lbs)	42.6 kg (94 lbs)	85 kg (187 lbs)	
Gross Weigh	44 kg (97 lbs)	87 kg (192 lbs)	45 kg (99 lbs)	89 kg (196 lbs)	
Dimensions LxWxH (mm)	615x445x457	695x534x547	615x445x457	695x534x547	
Packing Unit	1				

\*GV-7000S/GV-7600S without battery