




GENERATOR

Standard Generator

- **High Fuel Efficiency**
- **Ultimate Durability**
 - 100% Copper Wire for Alternator
 - Anti-Rusty fuel tank
 - Full roll cage for ultimate protection
- **Less Vibration & Quiet Operation**
- **All models have oil alert function.**



Easy to Carry



Specification


Model		GV-3000	GV-7000S	GV-3200	GV-7600S
GENERATOR	Phase	Single			
	Voltage Regulation	AVR			
	Rated Output	2 kVA	5 kVA	2.3 kVA	5.5 kVA
	Maximum Output	2.2 kVA	5.5 kVA	2.5 kVA	6 kVA
	AC Rated Frequency	50 Hz		60 Hz	
	Rated Voltage	220 V			
	Rated Ampere	9.1A	22.7 A	10.5 A	25 A
	DC Output	12 V/8.3 A			
	Continuous Running Time (rated load)	9.5 h	7.5 h	6.3 h	5 h
	Tank Capacity	12.6 L	22.6 L	12.6 L	22.6 L
Receptacle	 	 	  BS1363, 2pcs    CEE 7/4, 2pcs	  BS1363, 2pcs    CEE 7/4 NEMA L6-30	
	European socket, CEE 7/4, 2pcs	European socket, CEE 7/4, 1pc NEMA L6-30 Socket, 1pc			
ENGINE	Model	Koshin K210	Koshin K420	Koshin K210	Koshin K420
	Type	Air-cooled, 4-stroke, OHV, single cylinder			
	Displacement	212 cc	420 cc	212 cc	420 cc
	Oil Alert System	Standard			
	Starting system	Recoil	Recoil/Electric starter	Recoil	Recoil/Electric starter
	Battery	—	Maintenance-free type	—	Maintenance-free type
	Wheel Kit	—	Standard	—	Standard
	Net Weight	42.1 kg (93 lbs)	85 kg (187 lbs)	42.6 kg (94 lbs)	85 kg (187 lbs)
	Gross Weight	44 kg (97 lbs)	87 kg (192 lbs)	45 kg (99 lbs)	87 kg (192 lbs)
	Dimensions L×W×H (mm)	635 × 460 × 475	700 × 550 × 560	635 × 460 × 475	700 × 550 × 560
Packing Unit	1				

*GV-7000S/GV-7600S without battery

- All model have GFCI protection.
- Equipped with CO sensor with automatic shutdown



MULTI DISPLAY

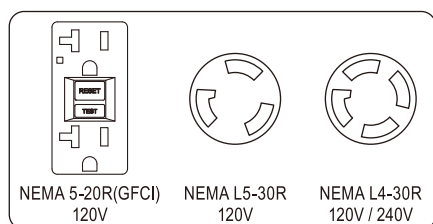

ANSI / PGMA G300-2018 standard

Intertek



GV-8000S



GV-6000S

*Battery Not Included

Specification

Model		GV-6000S	GV-8000S	
GENERATOR	Phase	Single		
	Voltage Regulation	AVR		
	Rated Output	5500 W(VA)	7200 W(VA)	
	Maximum Output	6000 W(VA)	8000 W(VA)	
	Rated Frequency	60 Hz		
	Rated Voltage	120 V/240 V		
	Rated Ampere	45.8 A / 22.9 A	60.0 A / 30.0 A	
	DC Output	8.3 A/12 V/100 W		
	Continuous Running Time (rated load)	4.6 hr	4.2 h	
	Tank Capacity	22.6 L (6.0 gal)		
RECEPTACLE				
		NEMA 5-20R(GFCI) ×2 120V	NEMA L5-30R ×1 120V	NEMA L4-30R ×1 120V / 240V
ENGINE	Model	Koshin R420-V		
	Type	Air-cooled, 4-stroke, OHV, single cylinder		
	Displacement	419 cc		
	Oil Alert System	Standard		
	Starting system	Recoil/Electric starter		
	Battery	12V Motorcycle Battery : 9 Ah		
	Wheel Kit	Standard (No Flat Tire)		
	Net Weight	83 kg (183 lbs)	86 kg (189.6 lbs)	
	Gross Weight	89.6 kg (197.5 lbs)	92.1 kg (203.0 lbs)	
	Dimensions L×W×H (mm)	734 × 714 × 630		
Packing Unit	1			

GENERATOR

■ All model have GFCI protection.

■ Equipped with CO sensor with automatic shutdown



■ MULTI DISPLAY



GV-3300iS only

■ One Push Start (Electric Starter) and auto choke.



GV-3300i



GV-2000i



GV-3300iS

■ Specification

Model (Destination Area)		GV-2000SE (Europe)	GV-3300i (Europe)	GV-2000i (North America)	GV-3300i (North America)	GV3300iS (North America)
GENERATOR	Phase	Single				
	Voltage Regulation	Inverter				
	Rated Output	1600 W(VA)	3000 W(VA)	1800 W(VA)	3000 W(VA)	
	Maximum Output	1800 W(VA)	3300 W(VA)	2000 W(VA)	3300 W(VA)	
	AC Rated Frequency	50 Hz			60 Hz	
	Rated Voltage	230 V			120 V	
	Rated Ampere	6.9 A	13 A	15 A	25 A	
	DC Output	5 V USB (2.1A, 1A)				
	Continuous Running Time (rated load)	3.1 hr	5.0 hr	4.0 hr		
	Tank Capacity	3.4 L	9.8 L	4.2 L (1.1 gal)	8.3 L (2.2 gal)	
RECEPTACLE	Receptacle	 European socket, CEE 7/4, 1pc	 European socket, CEE 7/4, 2pcs	 NEMA 5-20R(GFCI) ×1 120V	 NEMA 5-20R(GFCI) ×1 120V	 NEMA L5-30R ×1 120V
	Model	Koshin K80-i2	Koshin R210-Vi	Koshin K80-1	Koshin K210-V	
	Type	Forced Air-cooled, 4-stroke, OHV, single cylinder			Air-cooled, 4-stroke, OHV, single cylinder	
	Displacement	79.7 cc	212 cc	79 cc	212 cc	
	Oil Alert System	Standard				
ENGINE	Starting system	Recoil starter				Recoil/Electric starter
	Battery	—				
	Wheel Kit	—	Standard	—	Standard	
	Net Weigh	18 kg (39.7 lb)	44 kg (97 lb)	22 kg (48.5 lb)	44 kg (97 lb)	52 kg (114.6 lb)
	Gross Weigh	23 kg (50.7 lb)	50 kg (110.2 lb)	25 kg (55.1 lb)	50 kg (110.2 lb)	55 kg (121.2 lb)
	Dimensions L×W×H (mm)	520 × 320 × 490	620 × 535 × 580	520 × 320 × 490	620 × 535 × 580	620 × 535 × 580
	Packing Unit	1				