

# "GEAR PUMPS"

## Suitable for Water, Oil & Various Liquids Applications



GB-13  
GC-13



GB-25  
GC-25

### Applications (GB)

- Water
- Sea water
- Weak acids
- Various chemicals
- Coal tar




### Applications (GC)

- Kerosene
- Light oil
- Machine oil
- Heavy oil



### Performance Curve

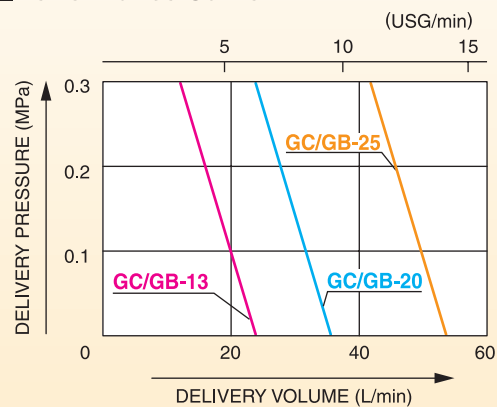

### Specifications

Model	GC-13	GB-13	GC-20	GB-20	GC-25	GB-25
Gear Material	GC: Cast Iron / GB: Brass					
Connection Dia	13 mm (½")		20 mm (¾")		25 mm (1")	
Delivery Volume (400 rpm)	21 L/min (5 USG/min)		37 L/min ( 9 USG/min)		55 L/min (14 USG/min)	
Delivery Pressure	0 - 0.3 MPa (0 - 3 kg/cm²)					
Suction Lift	4 m (13.1 ft) or less					
Power	200 W		400 W		750 W	
Pulley	5" (127mm) × A1		6" (152mm) × A1		8" (203mm) × A1	
Gross Weight	17.5 kg (38.6 lbs)		25 kg (55.1 lbs)		22.5 kg (49.6 lbs)	
Dimensions L×W×H (mm)	391 × 236 × 16.7		482 × 252 × 179		279 × 261 × 267	
Packing Unit			4		2	