


PERFORMANCE CURVE

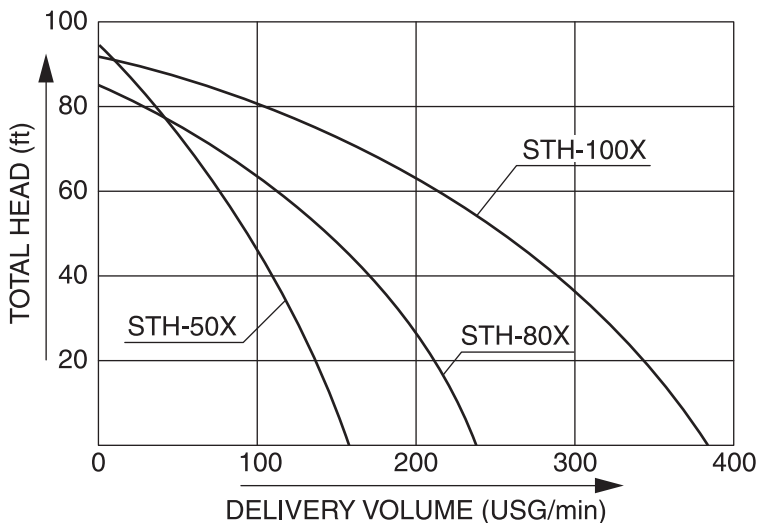

Note: Performance ratings are guaranteed minimum, not inflated maximum.

SPECIFICATIONS

Model			STH-50X	STH-80X	STH-100X
PUMP	Connection Dia		50mm (2")	80mm (3")	100mm (4")
	Connection Thread		NPT		
	Total Head		29m (95ft)	26m (85ft)	28m (91ft)
	Delivery Volume		600L/min (158USG/min)	900L/min (238USG/min)	1450L/min (383USG/min)
	Max. Suction Head		8m (26ft)		
ENGINE	Model		HONDA GX120	HONDA GX160	HONDA GX240
			Forced Air-cooled 4-stroke Gasoline Engine		
	Exhaust Volume		122cc	163cc	270cc
	Output	Rated Power	2.1kW (2.9PS)/3600rpm	2.9kW (3.9PS)/3600rpm	4.6kW (6.3PS)/3600rpm
		Max Power	2.4kW (3.3PS)/3600rpm	3.6kW (4.9PS)/3600rpm	5.9kW (8.0PS)/3600rpm
	Fuel		Automotive Unleaded Gasoline		
	Fuel Tank capacity		2.0L (0.53USG)	3.1L (0.82USG)	5.3L (1.40USG)
	Fuel Consumption Hour (full tank)		2hrs		2.5hrs
	Starting Method		Recoil Starter		
Standard Accessories		1 Strainer, 1 Spanner, 1 Engine Tool Set			
Net Weight		23kg (50.7lb)	29kg (63.9lb)	56kg (123.5lb)	

For the purpose of improvement, specifications are subject to changes without notice.

20-06 012094505